



NC Deburring



► Features >>

- High feed rate for high speed deburring on CNC machines.
- Indexable type ensures the relative position of deburring.




NC2032



► Inserts >>

- Smallest counter sink diameter Ø0.5 mm.
- Ideal for fine hole deburring.
- Each insert has one cutting edge.
- Using same tool holder of X060 engraving tool.
- Indexable type. Relative position of deburring depth and diameter are accurate.
- TiAlN coated carbide insert can stand very long life.




Code	Parts No.	Angle	Coating	Grade	Image	Dimensions			Tmax.	AP	
						L	S	Re		min.	max.
01X601	X060A60T6-NC2032	60°	TiAlN	K20F		6	2.0	--	1.75	0.1	1.0
01X901	X060A90T6-NC2032	90°				6	2.0	--	1.75	0.1	1.0

Deburring		Counter sinking	
Tmin.: 0.25 Tmax.: 1.75	Tmin.: 0.25 Tmax.: 1.75	Dmax.: 2.0	Dmax.: 3.5

► Holder >>

- Provides high rigidity and anti-vibration.
- One holder supports the entire X060 series of engraving inserts.




Code	Parts No.	Ød	L	Screw	Key
69X001	00-99619-X060-06	6	40	NS-22044 0.9Nm	NK-T7
* 69X002	00-99619-X060-06L	6	60		

► Starter Kit >>

Code	Parts No.	Shank Ø	Angle	Insert included	Content
69X202-X601	00-99619-X060-DB60-02K-32	6	60°	X060A60T6-NC2032	1 x Holder 1 x T7 Key 2 x inserts
69X202-X901	00-99619-X060-DB90-02K-32		90°	X060A90T6-NC2032	



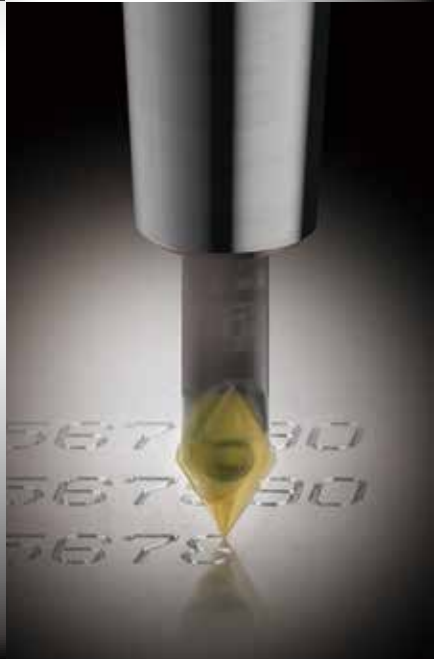

You will be interested to know the whole range of Nine9 tools.