

# Cutting Data

## ► Attention >>

- For d1< 4 mm or size #5, the center misalignment must be less than 0.05mm.
- If the CNC lathe turret center's misalignment is above 0.15mm, please use the Center Height Adjusting Sleeve. (See page 71)
- For low spindle speed special purpose machines or lathes, lower spindle speed is allowed but the feed rate should be maintained.


## ► Ø1~Ø3.15 (#2~#4) >>

Workpiece material	Vc (m/min.)	f d1	f (mm/rev)					Cutting fluid	
			IC08		IC12				
			Ø1~1.25	Ø1.6~3.15	Ø2 (#2)	Ø2.5 (#3)	Ø3.15 (#4)		
<b>Carbon steel C&lt;0.3%</b>	60-70-80	(S=17825 rpm) 0.02-0.03-0.05	(S=13930 rpm) 0.03-0.05-0.06	(S=11140 rpm) 0.04-0.06-0.08	(S=8912 rpm) 0.06-0.08-0.10	(S=7073 rpm) 0.08-0.10-0.12		emulsion	
	50-60-70	(S=17825 rpm) 0.02-0.03-0.05	(S=11940 rpm) 0.03-0.04-0.05	(S=9549 rpm) 0.03-0.04-0.05	(S=7639 rpm) 0.06-0.08-0.10	(S=6063 rpm) 0.08-0.10-0.12		emulsion	
	45-55-65	(S=14005 rpm) 0.01-0.02-0.04	(S=10950 rpm) 0.02-0.03-0.05	(S=8753 rpm) 0.02-0.03-0.05	(S=7002 rpm) 0.04-0.06-0.08	(S=5557 rpm) 0.06-0.08-0.10		emulsion	
	40-50-60	(S=12732 rpm) 0.01-0.02	(S=9950 rpm) 0.01-0.02-0.04	(S=7957 rpm) 0.01-0.02-0.04	(S=6366 rpm) 0.02-0.04-0.06	(S=5052 rpm) 0.04-0.06-0.08		emulsion	
<b>Stainless Steel</b>	5-10-20	(S=2546 rpm) 0.003-0.01	(S=1592 rpm) 0.005-0.02	(S=1592 rpm) 0.01-0.02	(S=1270 rpm) 0.01-0.02-0.03	(S=1010 rpm) 0.02-0.03-0.05		emulsion internal>5 bar	
<b>Cast iron</b>	50-60-70	(S=15278 rpm) 0.01-0.02-0.04	(S=11940 rpm) 0.02-0.04-0.06	(S=9549 rpm) 0.02-0.04-0.06	(S=7639 rpm) 0.04-0.06-0.08	(S=6063 rpm) 0.06-0.08-0.10		dry	
<b>Al, and non-ferrous metal</b>	100-150-200	(S=38197 rpm) 0.01-0.02-0.03	(S=29850 rpm) 0.01-0.02-0.04	(S=23873 rpm) 0.01-0.02-0.04	(S=19098 rpm) 0.02-0.03-0.05	(S=15157 rpm) 0.02-0.04-0.06		emulsion	

## ► Ø4~Ø10 (#5~#10) >>

Workpiece material	Vc (m/min.)	f d1	f (mm/rev)					Cutting fluid	
			IC16		IC20				
			Ø4 (#5)	Ø5 (#6)	Ø6.3 (#7)	Ø8 (#8)	Ø10 (#10)		
<b>Carbon steel C&lt;0.3%</b>	60-70-80	(S=5570 rpm) 0.08-0.12-0.14	(S=4456 rpm) 0.10-0.12-0.16	(S=3536 rpm) 0.10-0.14-0.16	(S=2785 rpm) 0.12-0.15-0.18	(S=2228 rpm) 0.14-0.18-0.20		emulsion	
	50-60-70	(S=4774 rpm) 0.08-0.12-0.14	(S=3819 rpm) 0.10-0.12-0.16	(S=3031 rpm) 0.10-0.14-0.16	(S=2387 rpm) 0.12-0.15-0.18	(S=1909 rpm) 0.14-0.18-0.20		emulsion	
	45-55-65	(S=4376 rpm) 0.06-0.08-0.10	(S=3501 rpm) 0.08-0.10-0.12	(S=2778 rpm) 0.08-0.12-0.14	(S=2188 rpm) 0.10-0.14-0.16	(S=1750 rpm) 0.12-0.16-0.20		emulsion	
	40-50-60	(S=3978 rpm) 0.04-0.06-0.08	(S=3183 rpm) 0.06-0.08-0.10	(S=2526 rpm) 0.08-0.10-0.12	(S=1989 rpm) 0.10-0.14-0.16	(S=1591 rpm) 0.10-0.14-0.16		emulsion	
<b>Stainless Steel</b>	10-15-25	(S=1194 rpm) 0.02-0.04-0.06	(S=955 rpm) 0.02-0.04-0.06	(S=758 rpm) 0.04-0.06-0.08	(S=597 rpm) 0.04-0.06-0.08	(S=477 rpm) 0.05-0.07-0.10		emulsion internal>5 bar	
<b>Cast iron</b>	50-60-70	(S=4774 rpm) 0.06-0.08-0.10	(S=3819 rpm) 0.08-0.10-0.12	(S=3031 rpm) 0.08-0.12-0.14	(S=2387 rpm) 0.10-0.14-0.16	(S=1909 rpm) 0.12-0.16-0.18		dry	
<b>Al, and non-ferrous metal</b>	100-150-200	(S=11936 rpm) 0.02-0.04-0.06	(S=9549 rpm) 0.04-0.06-0.08	(S=7578 rpm) 0.04-0.06-0.08	(S=5968 rpm) 0.06-0.08-0.10	(S=4774 rpm) 0.06-0.08-0.10		emulsion	

### • Clamping of the insert

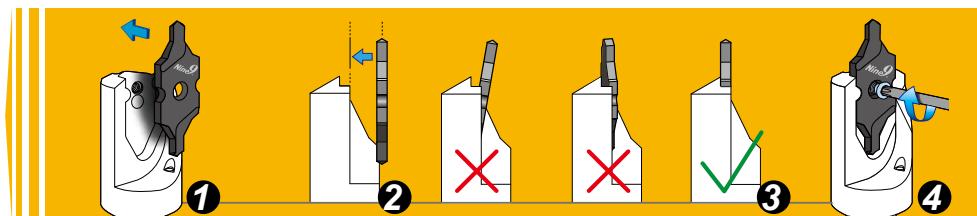

### • Unscrew the insert

